

Архангельск (8182)63-90-72  
Астана (7172)727-132  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06

Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93

<https://tektronix.nt-rt.ru> || [txk@nt-rt.ru](mailto:txk@nt-rt.ru)

# Tektronix Logic Analyzer Probes

## P5900 Series Datasheet



### Key features

- Low total capacitive loading minimizes intrusion on circuits
- 20 k $\Omega$  input resistance
- 7.5 V<sub>p-p</sub> dynamic range supports a broad range of logic families
- Variety of attachment mechanisms including the high-density D-Max®, Mictor, square pins, and flying leads.

### Applications

- Digital hardware validation and debug
- Monitoring, measurement, and optimization of digital hardware performance
- Embedded software integration, debug, and verification


### Leading probe solutions for real-time digital systems analysis – P5900 series probes

No test and measurement solution is complete without probing and the consideration of its impact on your system and your measurement time. With the industry's lowest probe loading, the P5900 Series logic analyzer probes protect the integrity of your signal - minimizing the impact on your design. The P5900 Series logic analyzer probes when used with TLA6400 Series logic analyzers make sophisticated logic analysis available at an affordable price. Select from a variety of attachment mechanisms, including the high-density D-Max®, Mictor, and general-purpose.

Verification and debug of today's high speed digital signals requires probing solutions that can accurately acquire from a wide variety of electronic designs and protect signal fidelity. Tektronix logic analyzer probes contain a variety of connectivity options that are engineered to ensure that signal acquisition is a true reflection of your design's performance.

### Notice to EU customers

This product is not updated to comply with the RoHS 2 Directive 2011/65/EU and will not be shipped to the EU. Customers may be able to purchase products from inventory that were placed on the EU market prior to July 22, 2017 until supplies are depleted. Tektronix is committed to helping you with your solution needs. Please contact your local sales representative for further assistance or to determine if alternative product(s) are available. Tektronix will continue service to the end of worldwide support life.

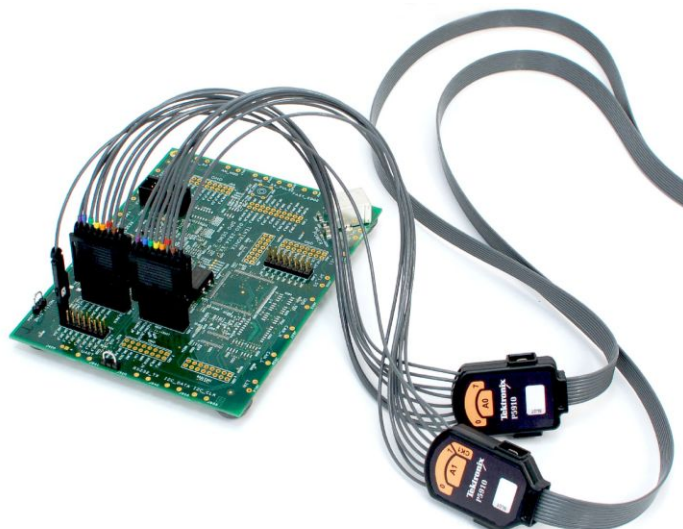


P5910 17-channel general purpose probe

The 17-channel P5910 provides flexible general-purpose probing, with support for 0.100 in. and 2 mm pin spacing, low input capacitance, and accessories for connecting to many industry-standard connections.



P5960 34-channel D-Max probe

For applications where circuit board space is limited, the 34-channel high-density P5960 D-Max offers the smallest available footprint and a quick connection mechanism.

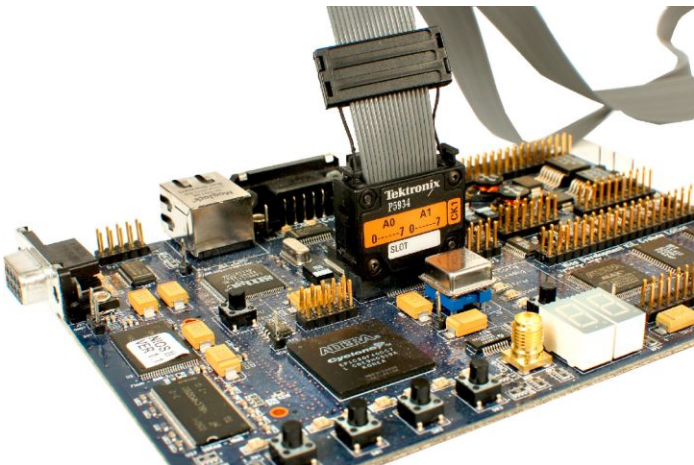

P5934 34-channel Mictor probe

The P5934 is 34-channel mictor probe with quick connect/disconnect and a positive-latching mechanism to ensure a secure, reliable connection.

# Specifications

All specifications are guaranteed unless noted otherwise. All specifications apply to all models unless noted otherwise.

Compatible with TLA6400 series logic analyzers

	P5910	P5934	P5960
Probe type	Single-ended Data Single-ended Clock (General purpose)	Single-ended Data Single-ended Clock (Mictor 34-channel)	Single-ended Data Single-ended Clock (D-Max® Probing Technology)
Number of channels	17	34	34
Recommended use	Most general-purpose applications	Applications requiring many channels to be connected quickly in a small footprint	High-performance applications requiring many channels to be connected quickly in a small footprint
Attachment to target system	Fits both 0.100 in. and 2 mm square pin configurations	Amp Mictor 34-channel connector	D-Max® probing technology compression cLGA

**P5900 probe specifications**

Input resistance	20 kΩ to ground, typical
------------------	--------------------------

**Input capacitance**

P5910	1.3 pF
P5934	2.0 pF
P5960	0.8 pF

Minimum digital swing	300 mV
-----------------------	--------

Analog bandwidth <sup>1</sup>	2 GHz
-------------------------------	-------

**Cable length**

P5910	1.5 m (5 ft.)
P5934	1.2 m (4 ft.)
P5960	1.5 m (5 ft.)

**Ordering information**

Model	Description
P5910	17-channel General-purpose probe with single-ended Data/Clock, separable podlets, and accessories <b>Includes</b> : podlet holders, IC grabbers, ground leads, ground tips, extension ground tips, probe labels
P5934	34-channel high-density Mictor probe with single-ended Data/Clock and accessories <b>Includes</b> : latch housing assembly (edge-mount), latch housing assembly (vertical), probe labels
P5960	34-channel high-density D-Max® Probing Technology Probe with single-ended Data/Clock and accessories <b>Includes</b> : probe head protective cover, probe retention kit for D-Max® Probing Technology, probe labels

**Probe options****Language options**

Opt. L0	English manual
Opt. L99	No manual

## Service options

Customers who choose a Tektronix product receive a support partnership focused on making the deployment and operation of their products successful. Tektronix support teams are committed to providing rapid response. A broad range of flexible services is available at the time of product purchase to meet customer service needs.

The following service options are offered for the P5900 logic analyzer probes.

Opt. C3	Calibration Service 3 Years
Opt. C5	Calibration Service 5 Years
Opt. R3	Repair Service 3 Years (including warranty)
Opt. R5	Repair Service 5 Years (including warranty)

## Standard accessories

### P5910

335-2736-xx	Sheet of probe labels
020-2662-xx	Probe accessory kit provides different means to connect the logic analyzer probe to the SUT.

### P5934

335-2738-xx	Sheet of probe labels
105-1088-xx	Latch housing assembly, edge-mount
105-1089-xx	Latch housing assembly, vertical

### P5960

335-2737-xx	Sheet of probe labels
020-2908-xx	Probe retention kit for D-Max® Probing Technology (contains 2 retention shrouds)

## Recommended accessories

### P5910

020-2622-xx	Probe accessory kit provides different means to connect the logic analyzer probe to the SUT
020-2711-xx (20 included)	20 Extension ground tips
131-5638-xx (20 included)	Probe tip
020-2733-xx (20 included)	IC grabber
020-2712-xx (8 included)	3-inch ground lead set
020-2713-xx (2 included)	8-inch ground lead set
352-1115-xx (2 included)	Probe grouper

### P5934

131-6134-xx	AMP Mictor Connector, Surface-Mount
020-2228-xx (21 included)	AMP Mictor Connector, Surface-Mount
020-2456-xx	Compression-on-PCB to Mictor Adapter, 34 channel

**P5960**

**020-2910-xx (50 included)** Probe retention kit for D-Max® Probing Technology

**020-2539-xx** Post-style probe retention kit for D-Max® Probing Technology



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.

**Архангельск** (8182)63-90-72  
**Астана** (7172)727-132  
**Астрахань** (8512)99-46-04  
**Барнаул** (3852)73-04-60  
**Белгород** (4722)40-23-64  
**Брянск** (4832)59-03-52  
**Владивосток** (423)249-28-31  
**Волгоград** (844)278-03-48  
**Вологда** (8172)26-41-59  
**Воронеж** (473)204-51-73  
**Екатеринбург** (343)384-55-89  
**Иваново** (4932)77-34-06

**Ижевск** (3412)26-03-58  
**Иркутск** (395)279-98-46  
**Казань** (843)206-01-48  
**Калининград** (4012)72-03-81  
**Калуга** (4842)92-23-67  
**Кемерово** (3842)65-04-62  
**Киров** (8332)68-02-04  
**Краснодар** (861)203-40-90  
**Красноярск** (391)204-63-61  
**Курск** (4712)77-13-04  
**Липецк** (4742)52-20-81  
**Киргизия** (996)312-96-26-47

**Магнитогорск** (3519)55-03-13  
**Москва** (495)268-04-70  
**Мурманск** (8152)59-64-93  
**Набережные Челны** (8552)20-53-41  
**Нижний Новгород** (831)429-08-12  
**Новокузнецк** (3843)20-46-81  
**Новосибирск** (383)227-86-73  
**Омск** (3812)21-46-40  
**Орел** (4862)44-53-42  
**Оренбург** (3532)37-68-04  
**Пенза** (8412)22-31-16  
**Россия** (495)268-04-70

**Пермь** (342)205-81-47  
**Ростов-на-Дону** (863)308-18-15  
**Рязань** (4912)46-61-64  
**Самара** (846)206-03-16  
**Санкт-Петербург** (812)309-46-40  
**Саратов** (845)249-38-78  
**Севастополь** (8692)22-31-93  
**Симферополь** (3652)67-13-56  
**Смоленск** (4812)29-41-54  
**Сочи** (862)225-72-31  
**Ставрополь** (8652)20-65-13  
**Казахстан** (772)734-952-31

**Сургут** (3462)77-98-35  
**Тверь** (4822)63-31-35  
**Томск** (3822)98-41-53  
**Тула** (4872)74-02-29  
**Тюмень** (3452)66-21-18  
**Ульяновск** (8422)24-23-59  
**Уфа** (347)229-48-12  
**Хабаровск** (4212)92-98-04  
**Челябинск** (351)202-03-61  
**Череповец** (8202)49-02-64  
**Ярославль** (4852)69-52-93

<https://tektronix.nt-rt.ru> || [txk@nt-rt.ru](mailto:txk@nt-rt.ru)