

Архангельск (8182)63-90-72
 Астана (7172)727-132
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89
 Иваново (4932)77-34-06

Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Липецк (4742)52-20-81
 Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Россия (495)268-04-70

Пермь (342)205-81-47
 Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Казахстан (772)734-952-31

Сургут (3462)77-98-35
 Тверь (4822)63-31-35
 Томск (3822)98-41-53
 Тула (4872)74-02-29
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Ярославль (4852)69-52-93

<https://tektronix.nt-rt.ru> || txk@nt-rt.ru

DPO7OE Series Optical Probes

DPO7OE1 and DPO7OE2



Features and benefits

- Accurate Optical Reference Receiver (ORR) filters for 25 GBd, 26 GBd, 28 GBd, and 53 GBd optical networking standards ensure highest measurement accuracy and correlation
- Versatile design delivers Bessel-Thompson ORR specified bandwidths or unfiltered response up to 59 GHz on multiple channels
- Broad wavelength with FC/PC or FC/APC connector options
- High sensitivity and low noise provide best SNR for high-speed signal analysis
- Enables deep analysis of PAM4 and PAM2 (NRZ) signaling, equalization and error detection/isolation
- Compatible with ATI and TekConnect® channels for maximum performance or channel density

Applications

- Datacenter networking equipment design validation
- Research - Characterization of laser-based velocity measurement system (e.g. PDV, BLR) and other optical phenomena
- System debug of optical interfaces using a real time oscilloscope's unique debug features

The DPO7OE Series Optical probes can be used as Optical Reference Receivers (ORR) for high speed serial data signals (using selectable Bessel-Thomson ORR filters), or can be used as a conventional O/E converter for general wide-bandwidth optical signal acquisition. The DPO7OE Series is compatible with DPO/MSO70000 C/DX/SX models. Connect to TekConnect channels for up to 33 GHz electrical bandwidth. Connected to ATI channels, the DPO7OE1 provides up to 42 GHz electrical response; the DPO7OE2 provides up to 59 GHz electrical bandwidth response.


Optical reference receiver performance

Achieving Optical Reference Receiver (ORR) response requires sufficient instrument bandwidth to ensure smooth frequency roll-off characteristics beyond the data rate. For design of Datacenter Networking equipment, an ORR with a fourth-order Bessel-Thomson (BT4) frequency response is generally used. For NRZ (PAM2), the reference receiver's -3 dB electrical bandwidth is set to a frequency of 75% of the optical symbol rate and its bandwidth limit guard bands are specified to a frequency of 150% of the optical symbol rate. Using these values for a 28 Gbd optical signal yields the following frequency response requirements:

Optical reference receiver attenuation	Frequency
-3 dB	$0.75 * 28\text{ G} = 21\text{ GHz}$
Nominal: -13.4 dB Range: -9.4 to -17.4 dB	$1.50 * 28\text{ G} = 42\text{ GHz}$

For PAM4 signals the BT4 filter is tuned lower. The electrical bandwidth is set to a frequency corresponding to 50% of the symbol rate. The ORR BT4 filters for the important symbol rates of PAM4 standards, such as 53.152 GBd and 26.5625 GBd, are also available in the DPO70E Series.

Acquiring signals on a high-bandwidth ATI channel maintains linear phase across the passband of the channel. This makes it possible to enable true optical reference receiver (ORR) quality filters for baud rates up to 28 Gbd on the DPO70E1, which requires a controlled electrical response up to 42 GHz, and PAM4 baud rates up to 53 GBps on the DPO70E2. The graph below shows a typical frequency response of the DPO70E1 on a DPO77002SX real-time oscilloscope.

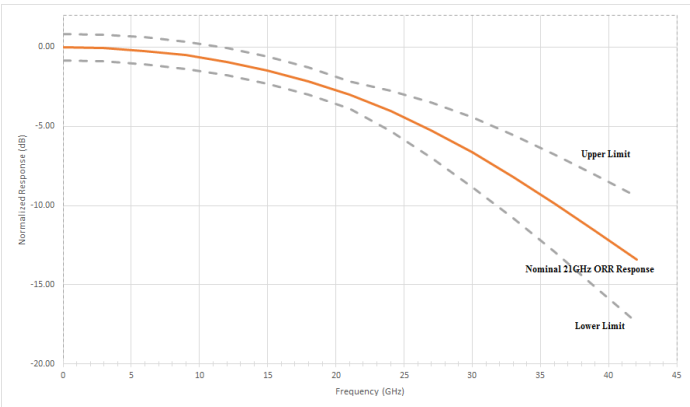

Fourth order Bessel-Thompson frequency response of the DPO70E1 Optical Probe and DPO70000SX ATI channel

The smooth, controlled system response with the DPO70E Series and DPO70000SX oscilloscope is possible because the oscilloscope's system software calculates the BT4 filters using the S-parameters unique to the optical probe and the oscilloscope channel. Most real-time oscilloscopes today have a rather sharp roll-off (e.g. "brick wall") at or just above the rated channel bandwidth. This response limits the ability to replicate a true BT4 response, which has a much more gradual roll-off characteristic. Without a true BT4 response, the signal's eye opening will be reduced, adversely impacting the accuracy of the measurement.


Optical signal analysis

The DPO70E Series optical probe enables deep analysis of PAM4-O and PAM2 (NRZ) signaling using Tektronix' industry leading DPOJET Jitter and Eye Analysis and PAM4 Analysis software.

DPOJET supports the traditional optical measurements. These measurements include extinction ratio, eye high, eye low, eye crossing, and optical modulation amplitude.

Industry-leading PAM4 signaling analysis

The PAM4-O software supports analysis of PAM4 optical signals with clock recovery, error detection, and IEEE and OIF-CEI standard specific measurements, e.g. TDECQ.

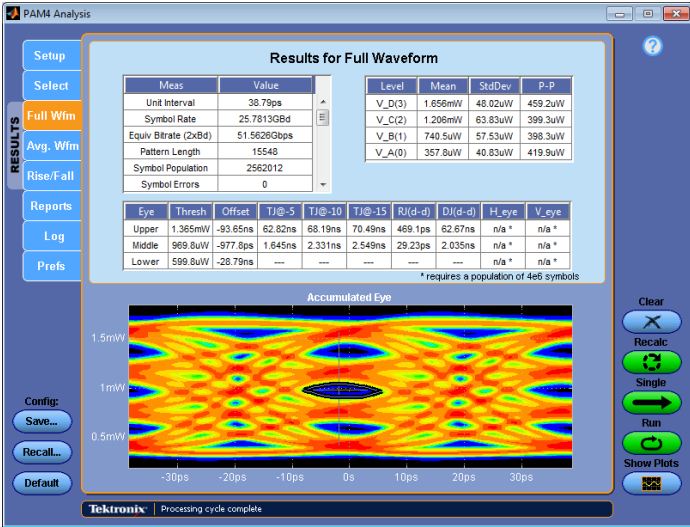


PAM4 Analysis Software with Eye Diagram and Example measurement Results

Versatile configurations

The versatile design of the DPO70E Series optical probe is compatible with either a DPO70000SX oscilloscope's ATI channel or channels with the TekConnect interface. This versatility makes the DPO70E Series optical probe suitable for use with all DPO70000SX, MSO/DPO70000DX, and MSO/DPO70000C series oscilloscopes.



Optical Reference Receiver with controlled response up to 59 GHz on a DPO70000SX oscilloscope's ATI channel

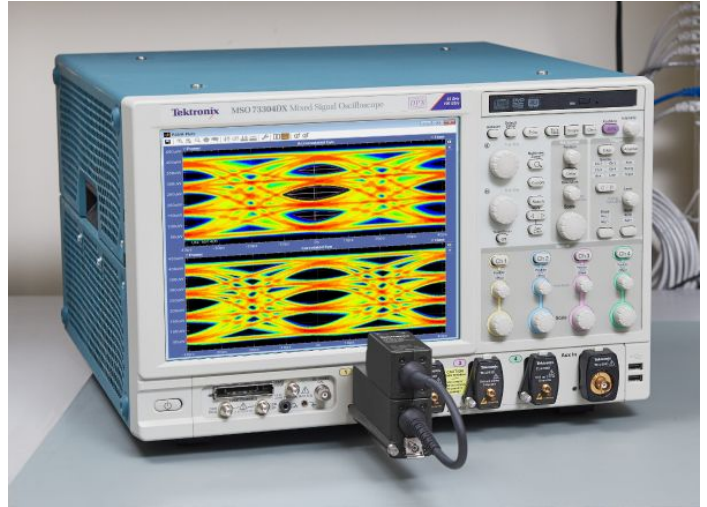

DPO70E series probes are compatible with MSO/DPO70000DX models



DPO70000SX models support up to 4 optical inputs with 33 GHz maximum bandwidth

Specifications

All specifications are guaranteed unless noted otherwise. All specifications apply to all models unless noted otherwise. ¹

Nominal characteristics

Electrical bandwidth (-3 dB) ²	DPO70E1: 33 GHz DPO70E2: 59 GHz												
4th order Bessel Thomson filters ³	User specified												
Coupling	DC												
Wavelength range (Opt. FC/PC)	DPO70E1: 750 nm to 1650 nm DPO70E1: 850 nm, 1310 nm, 1550 nm (calibrated) ⁴ DPO70E2: 1200 nm to 1650 nm DPO70E2: 1310 nm, 1550 nm (calibrated) ⁴												
Wavelength range (Opt. FC/APC)	1310 nm, 1550 nm (calibrated) ⁴ DPO70E1: 1260 nm to 1650 nm DPO70E2: 1200 nm to 1650 nm												
Optical connector types													
Opt. FC/PC	FC/PC (FC is determined by the changeable JAE connector)												
Opt. FC/APC	FC/APC												
Input fiber core diameter (maximum)	<table><tr><th>Probe</th><th>Option</th><th>Specification</th></tr><tr><td rowspan="2">DPO70E1</td><td>FC/PC</td><td>50 μm (SMF and MMF compatible)</td></tr><tr><td>FC/APC</td><td>9 μm (SMF compatible)</td></tr><tr><td rowspan="2">DPO70E2</td><td>FC/PC</td><td rowspan="2">9 μm (SMF compatible)</td></tr><tr><td>FC/APC</td></tr></table>	Probe	Option	Specification	DPO70E1	FC/PC	50 μm (SMF and MMF compatible)	FC/APC	9 μm (SMF compatible)	DPO70E2	FC/PC	9 μm (SMF compatible)	FC/APC
Probe	Option	Specification											
DPO70E1	FC/PC	50 μm (SMF and MMF compatible)											
	FC/APC	9 μm (SMF compatible)											
DPO70E2	FC/PC	9 μm (SMF compatible)											
	FC/APC												
Oscilloscope interfaces	ATI (1.85 mm RF connector), TekConnect												

Optical characteristics

Rise time (10% to 90%) ⁵	DPO70E1: 10.2 ps, typical DPO70E2: 7.5 ps, typical
Maximum input power (linear response)	DPO70E1: 4 mW, typical DPO70E2: 2 mW, typical
Maximum non-destruct input signal	DPO70E1: 8 mW, typical DPO70E2: 4 mW, typical
Input return loss	DPO70E1: >19 dB, typical DPO70E2: >27 dB, typical
Aberrations	3% pk-pk (for ORR filters only), typical
Output zero (dark level) (for filters >25 GHz bandwidth)	$\pm (10 \mu\text{W} + 4\% \cdot \text{vertical offset})$, 1310 nm and 1550 nm $\pm (12 \mu\text{W} + 4\% \cdot \text{vertical offset})$, 850 nm (DPO70E1 only)
Polarization dependence	DPO70E1 (1310 nm and 1550 nm inputs): ± 0.3 dB maximum DPO70E2 (1310 nm and 1550 nm inputs): ± 0.2 dB maximum
DC vertical accuracy	$\pm (25 \mu\text{W} + [(0.04 + \text{Connector Uncertainty}) \cdot ((\text{vertical reading}) - (\text{vertical offset}))])$, typical

Optical characteristics

DPO70E1: Optical noise, RMS 850 nm

Filter	TekConnect		ATI	
	Typical (µW)	Max (µW)	Typical (µW)	Max (µW)
Unfiltered O/E response	13.51	17.62	17.92	19.40
Flat to max	20.05	27.90	35.66	38.40
User 12.6 GHz (for 16.8 GBd NRZ)	12.09	15.64	11.61	16.35
User 21.0375 GHz (for 28.05 GBd NRZ)	12.94	18.40	13.66	19.30

1310 nm

Filter	TekConnect		ATI	
	Typical (µW)	Max (µW)	Typical (µW)	Max (µW)
Unfiltered O/E response	7.98	9.53	10.01	10.77
Flat to max	11.40	13.72	16.19	24.20
User 12.6 GHz (for 16.8 GBd NRZ)	5.59	8.25	6.70	8.87
User 21.0375 GHz (for 28.05 GBd NRZ)	7.47	9.70	7.88	10.44

1550 nm

Filter	TekConnect		ATI	
	Typical (µW)	Max (µW)	Typical (µW)	Max (µW)
Unfiltered O/E response	8.15	10.08	10.65	11.44
Flat to max	11.74	14.66	16.64	25.60
User 12.6 GHz (for 16.8 GBd NRZ)	5.91	7.87	6.94	9.27
User 21.0375 GHz (for 28.05 GBd NRZ)	7.58	9.23	8.15	10.89

DPO70E2: Optical noise, RMS 1310 nm

Filter	TekConnect		ATI	
	Typical (µW)	Max (µW)	Typical (µW)	Max (µW)
Unfiltered O/E response	11.8	13.8	16.8	18.8
Flat to max	11.8	13.8	16.8	18.8
User 12.6 GHz (for 16.8 GBd NRZ)	8.3	10.3	8.3	10.3
User 29.5 GHz	NA	NA	12.5	15.3

1550 nm

Filter	TekConnect		ATI	
	Typical (µW)	Max (µW)	Typical (µW)	Max (µW)
Unfiltered O/E response	13.8	15.8	18.8	20.8
Flat to max	13.3	15.3	19.3	21.3
User 12.6 GHz (for 16.8 GBd NRZ)	9.3	11.3	9.3	11.3
User 29.5 GHz	NA	NA	14	16.8

Compatibility

Compatible Tektronix oscilloscopes	DPO70000SX, DSA/DPO70000D, MSO/DPO70000DX, MSO/DSA/DPO70000C
---------------------------------------	--

Temperature

Temperature	
Operating	10 °C to +40 °C
Non-operating	-22 °C to +60 °C

Ordering information

Models

DPO70E1	33 GHz bandwidth, single/multi-mode, 750 nm to 1650 nm, optical probe for MSO/DPO70000 Real Time Oscilloscopes
DPO70E2	59 GHz bandwidth, single-mode 1200 nm to 1650 nm, optical probe for MSO/DPO70000 Real Time Oscilloscopes

Standard accessories

Hard case, Instruction manual, Certificate of Traceable Calibration, One year warranty, Optical fiber cleaning tool, ATI input support accessory



Recommended oscilloscope application software

PAM4-O	Optical Measurements for PAM4
DJA	DPOJET Jitter and Eye Diagram Analysis with Optical Measurements
DJAN	DPOJET Jitter and Eye Diagram Analysis with Vertical Noise Separation
SDLA	Serial Data Link Analysis

Recommended accessories

006-8327-xx	Optical connector cleaner
-------------	---------------------------

Options

Product options

Note: Select an optical input connector type from the following mandatory, mutually exclusive options.

FC/APC	FC/APC optical input connector (typically used in research applications)
FC/PC	FC/PC optical input connector (typically used in networking/data center network applications)

Service options

Opt. C3	Calibration Service 3 Years
Opt. C5	Calibration Service 5 Years
Opt. D3	Calibration Data Report 3 Years (with Opt. C3)
Opt. D5	Calibration Data Report 5 Years (with Opt. C5)
Opt. G3	Complete Care 3 Years (includes loaner, scheduled calibration, and more)
Opt. G5	Complete Care 5 Years (includes loaner, scheduled calibration, and more)
Opt. R3	Repair Service 3 Years (including warranty)
Opt. R5	Repair Service 5 Years (including warranty)

Probes and accessories are not covered by the oscilloscope warranty and service offerings.



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.

Архангельск (8182)63-90-72	Ижевск (3412)26-03-58	Магнитогорск (3519)55-03-13	Пермь (342)205-81-47	Сургут (3462)77-98-35
Астана (7172)727-132	Иркутск (395)279-98-46	Москва (495)268-04-70	Ростов-на-Дону (863)308-18-15	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Казань (843)206-01-48	Мурманск (8152)59-64-93	Рязань (4912)46-61-64	Томск (3822)98-41-53
Барнаул (3852)73-04-60	Калининград (4012)72-03-81	Набережные Челны (8552)20-53-41	Самара (846)206-03-16	Тула (4872)74-02-29
Белгород (4722)40-23-64	Калуга (4842)92-23-67	Нижний Новгород (831)429-08-12	Санкт-Петербург (812)309-46-40	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Кемерово (3842)65-04-62	Новокузнецк (3843)20-46-81	Саратов (845)249-38-78	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Киров (8332)68-02-04	Новосибирск (383)227-86-73	Севастополь (8692)22-31-93	Уфа (347)229-48-12
Волгоград (844)278-03-48	Краснодар (861)203-40-90	Омск (3812)21-46-40	Симферополь (3652)67-13-56	Хабаровск (4212)92-98-04
Вологда (8172)26-41-59	Красноярск (391)204-63-61	Орел (4862)44-53-42	Смоленск (4812)29-41-54	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Курск (4712)77-13-04	Оренбург (3532)37-68-04	Сочи (862)225-72-31	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Липецк (4742)52-20-81	Пенза (8412)22-31-16	Ставрополь (8652)20-65-13	Ярославль (4852)69-52-93
Иваново (4932)77-34-06				
	Киргизия (996)312-96-26-47	Россия (495)268-04-70	Казахстан (772)734-952-31	